P500 SERIES WELDING AND COMPRESSED GAS GAUGE

Size	: 2" (50mm), 2.5" (63mm)
Measuring Range	: 15 psi up to 4,000 psi (280 bar)
Dial	: white aluminum with markings and graduations
Window	: plastic, threaded polycarbonate
Pointer	: black finished aluminum
Ring	: gold painted steel, chrome plating steel, polished brass
Case	: gold painted steel, chrome plating steel, polished brass
Movement	: brass
Socket	: brass
Bourdon Tube	: phosphor bronze C-tube for 15 psi to 800 psi, spiral tube wound for 1,000 psi to 4,000 psi
Connection	: 1/8", 1/4"
Mounting	: bottom
Accuracy	: 2" (± 2.5% of full scale), 2.5" (± 1.5 % of full scale)
Operating Temperature Limit	: -20 ~ 60°C (-4 ~140°F)
Application	: welding tank regulator service (low pressure for regulator, high pressure for tank)

AC-A (Direct Mount, Bottom Connection)

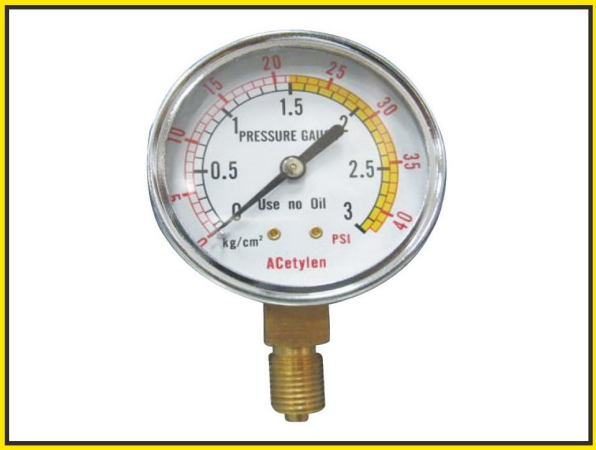

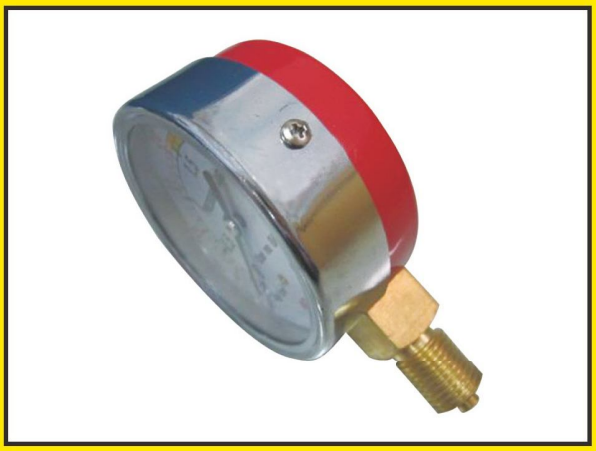

OX-A (Direct Mount, Bottom Connection)

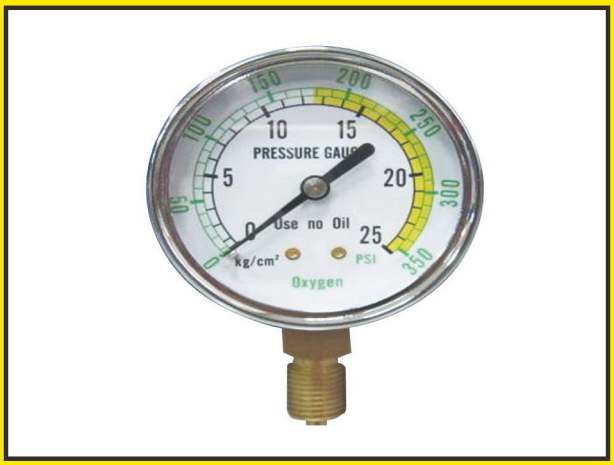

AP-A (Direct Mount, Bottom Connection)